



Der G Sub ist ein 18" Hochleistungs-Subwoofer für universelle Anwendungen und erzeugt bereits ab 35 Hz hohe und unverzerrte Tieftonepegel. Das spezielle Gehäusedesign garantiert hohe Reichweite und geringe Powerkompression. Der G Sub überzeugt durch sein ideales Handling und ist horizontal und vertikal einsetzbar. Für den Transport kann auf der Vorderseite ein Rollenwagen montiert werden.

## PRODUCT SPECIFICATIONS

<b>Speaker Components</b>	18" Nd
<b>Description</b>	Passive Bass Extension
<b>Power</b> AES / Peak	1800 W / 5400 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1m	101 dB / 138 dB (1,8 kW version)
<b>Usable Range</b> - 6 dB	35 Hz - 180 Hz
<b>Tuning Frequency</b> excursion minimum	40 Hz
<b>Connectors</b>	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub
<b>Handles</b>	3 x
<b>Rigging / Fittings</b>	M20 on top and side Wheelboard fittings
<b>Weight</b>	43,0 kg (1,8 kW version) (+ 7,0 kg wheelboard)
<b>Size</b> height x width x depth	69,8 x 51,2 x 68,0 cm
<b>Order No.</b>	<b>00600/1,8 kW</b>



Robustes Wabenlochgitter für starke Beanspruchung.




Zwei große Schalengriffe ermöglichen einfaches Handling.




Praktischer Eckziehhgriff.

## DIMENSIONS

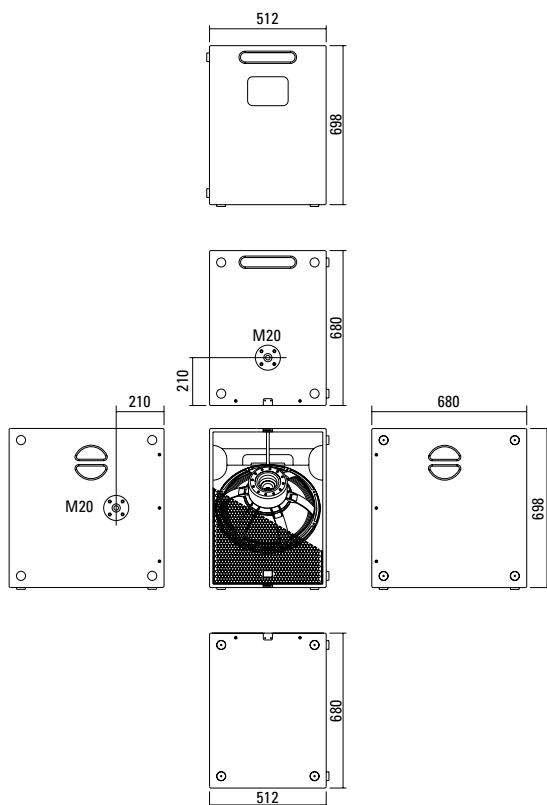


## MEASUREMENTS

### Frequency Response with Presets

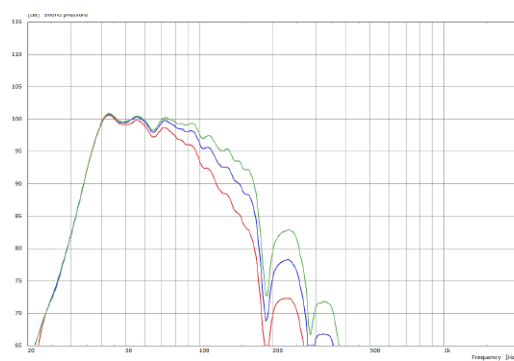


### Sensitivity 1 W @ 1 m + Impedance

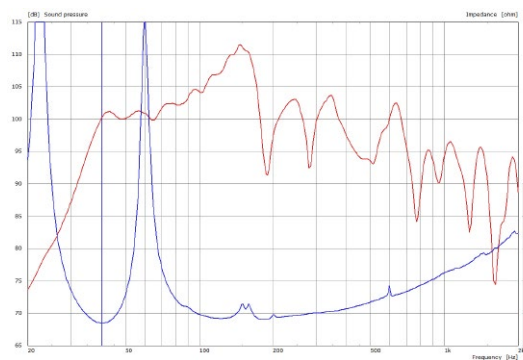

Controller Setups finden Sie unter:

<http://www.seeburg.net/Controller-Setups>


## APPLICATIONS

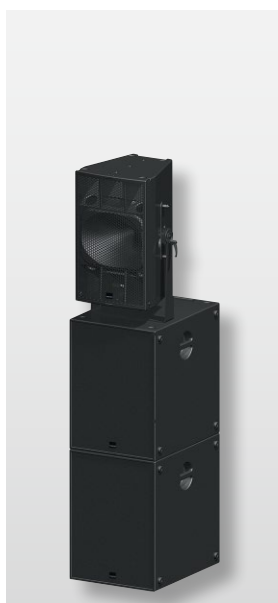

2 x G Sub / K 24



G Sub / GL 24

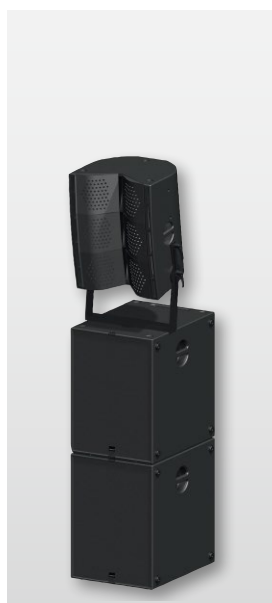

2 x G Sub / G3



G Sub / TSM 12

## ACCESSORIES G Sub

### Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



### Groundstacking Board

for G Sub / K Sub 1801  
with extendable legs

Order No. **01394**



### Ceiling Mount

for Subwoofer

Order No. **08129**



### Cover

for G Sub, padded

Order No. **01232**



### Wheelboard

for G Sub / K Sub 1801,  
stackable, 7 kg

Order No. **01260**



Stackable Wheelboard.



Ceiling Mount.

